


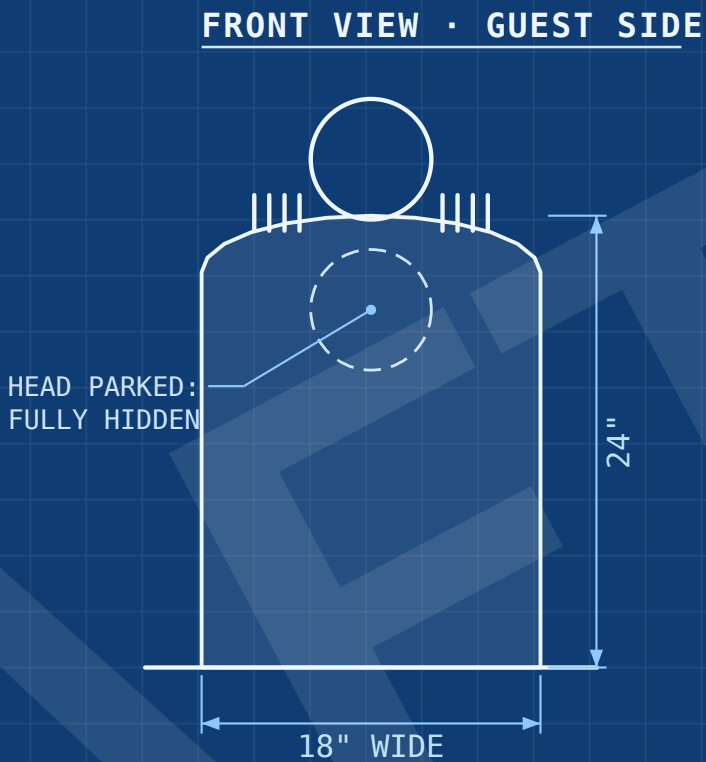


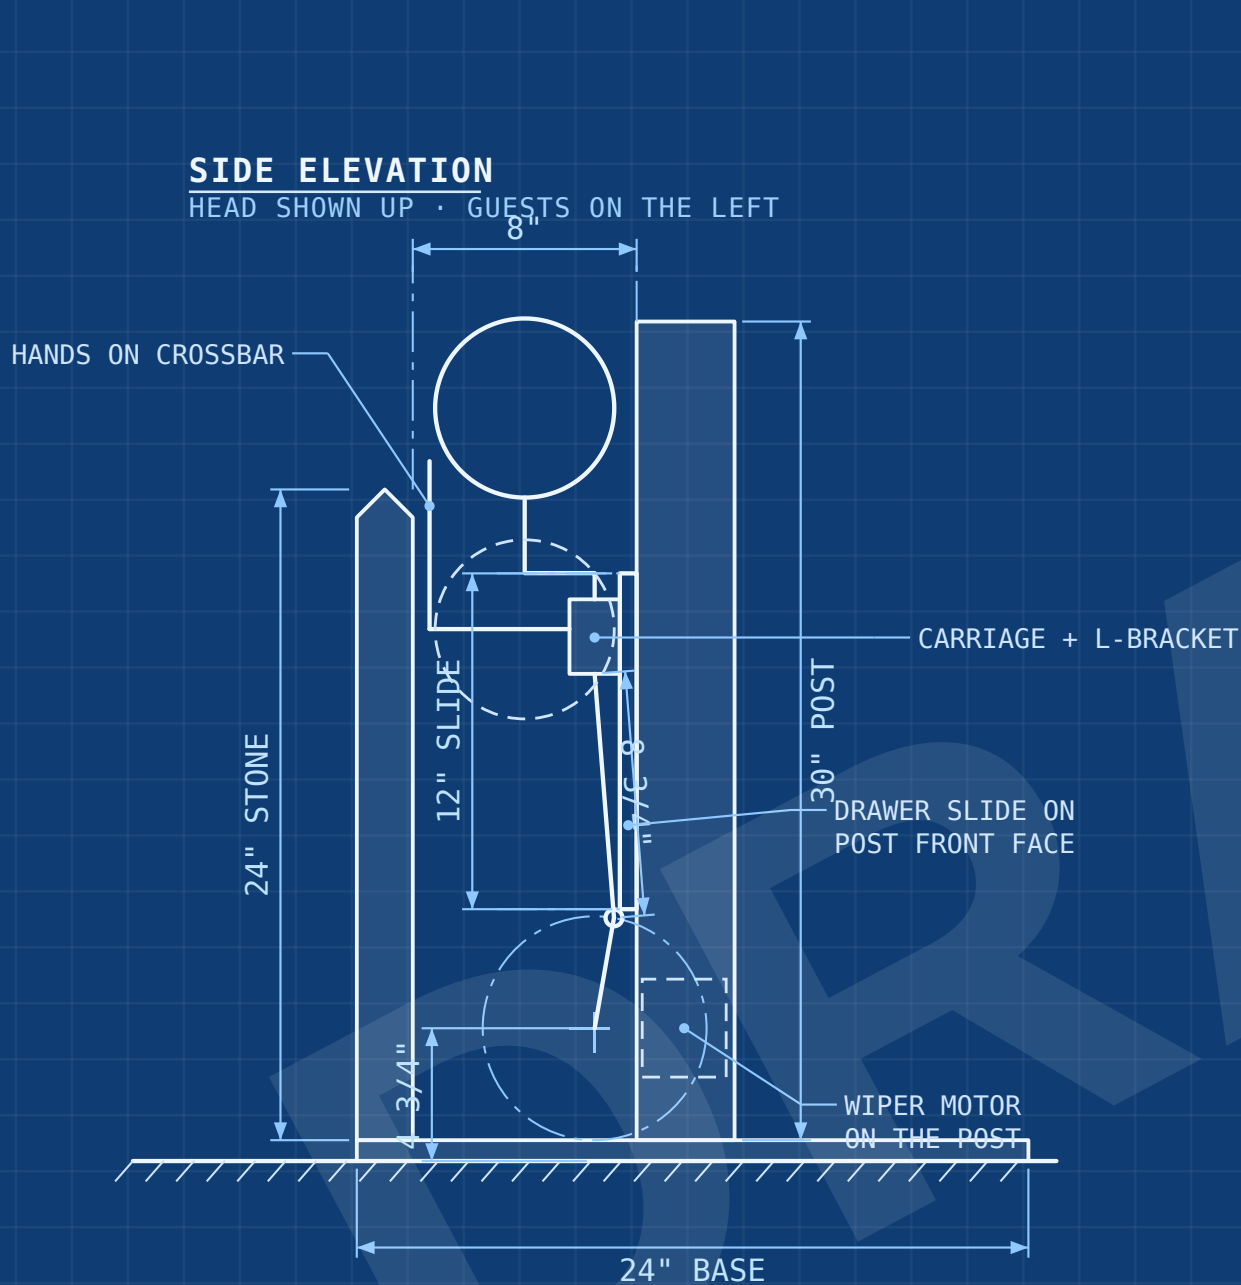

DETAIL A · CRANK

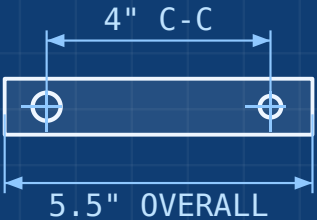

DETAIL B · PUSHROD



NOTES

1. Dimensions in inches. Post front face 8" behind the back of the stone; slide on it from 9" to 21" above the ground.
2. Motor shaft 4 3/4" above the ground, in line with the slide.
3. An L-bracket on the carriage sets the head 2 1/2" forward of the slide, clear of the post and the stone.
4. Head center travels from 19" (hidden) to 27" (eyes over the 24" stone). Set park head-down.

CUT LIST & HARDWARE

QTY	PART	SIZE / SPEC
1	Base, 3/4" plywood	12 × 24
1	Tombstone, 2" foam	18 × 24
1	Post, 2×4	30"
1	Drawer slide, full ext.	12"
1	Carriage + L-bracket	3/4" ply, 2 × 2 3/4"
1	Wiper motor (with park)	12V
1	Crank, 1/4" flat bar	1 × 5 1/2"
1	Pushrod, flat bar	9 3/4" (8 3/4" C-C)
1	Auto relay + fuse	40A relay, 15A fuse

PROP CONTROL · DIY PROJECT 05

**TOMBSTONE
PEEKER**

Head on a drawer slide · wiper + park

SCALE	UNITS	SHEET
NOT TO SCALE	INCHES	1 OF 1
REV	DATE	DRAWN
A	2026-10-13	PROP CONTROL